

# Rebuild Kit IMC 525 – 526 Replace for Insinkerator SS100

Voltages 220 - 1- 50/60 – 415 – 440 – 3 - 50/60



**Cut and Weld ISE Adapter No. 6**



**No. 6 Collar Adaptor**




**Switch MS10**



- For welding into stainless troughs
- Permanently installed splash baffle
- Includes mounting adaptor for mounting disposer
- Inside dimension collar: 6 5/8"

## DISPOSER MOUNTING ASSEMBLIES (choose one)




### Bowl Mounts

-   Type A Sink Bowl Assembly: Includes bowl, water nozzle(s), bowl cover, splash baffle
-   Type B Sink Bowl Assembly: Includes bowl, water nozzle(s), silver guard, splash baffle
-   Type C Sink Bowl Assembly: Includes bowl, water nozzle(s), splash baffle

### Sink Bowl Assembly Size

- 12" (304.8 mm) with one adjustable water nozzle
- 15" (381.0 mm) with one adjustable water nozzle
- 18" (457.2 mm) with two adjustable water nozzles

### Collar Mounts

-   #5 Sink Flange Mounting Assemblies for 3-1/2" – 4" (88.9 mm – 101.6 mm) sink opening (support legs are recommended)
-   #6 Collar Adaptor for welding into trough, provides 6-5/8" (168.3 mm) opening, includes splash baffle
-   #7 Collar Adaptor for welding into sink, provides 6-5/8" (168.3 mm) opening, includes splash baffle and stopper


## DIMENSIONS

**IMPORTANT:** Use dimension chart below for adaptor height in place of InSinkErator bowl sink height when mounting directly to a sink.


Bowl Sinks	Flange O.D. X	Work Table Hole Y	Flange I.D. Z	Height
12" (304.8 mm)	13-1/2" (342.9 mm)	12-1/4" (311.2 mm)	12" (304.8 mm)	6-1/2" (165.1 mm)
15" (381 mm)	16-1/2" (419.1 mm)	15-1/4" (387.4 mm)	15" (381.0 mm)	6-1/2" (165.1 mm)
18" (457.2 mm)	19-1/2" (495.3 mm)	18-1/4" (463.6 mm)	18" (457.2 mm)	6-1/2" (165.1 mm)
Adaptors	X	Y	Z	Height
No. 5	Fits Standard Sink Opening: 3-1/2" – 4" (88.9 mm – 101.6 mm)			2-3/4" (69.9 mm)
No. 6	7-13/16" (198.4 mm)	6-7/8" (174.6 mm)	6-5/8" (168.3 mm)	1-3/16" (30.2 mm)
No. 7	9-1/8" (231.8 mm)	7-7/8" (200.0 mm)	7-5/8" (193.7 mm)	2-1/16" (52.4 mm)

### NOTE:

- Adaptors are available upon request for all competitor sink bowls or cones.
- Please have sink bowl/cone type with the necessary dimensions when ordering adaptors.

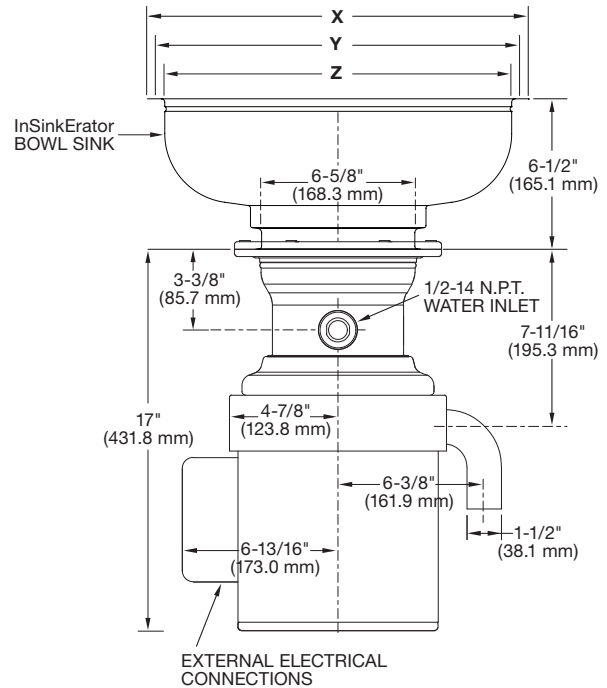

## RECOMMENDED INSTALLATION

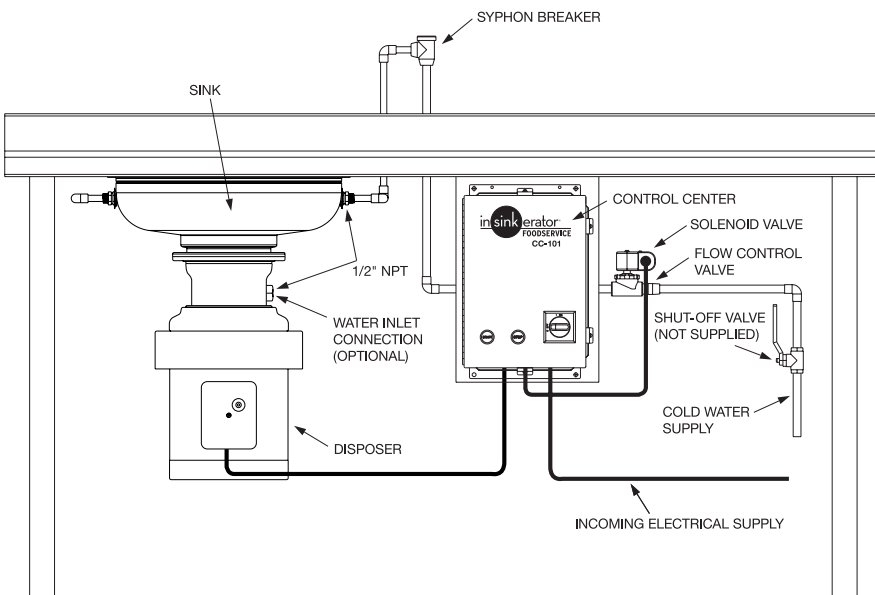

### RECOMMENDED WATER USAGE

	Standard	Optional
SS-50	3 GPM (11.4 LPM)	N/A
SS-75	3 GPM (11.4 LPM)	N/A
SS-100	5 GPM (18.9 LPM)	3 GPM (11.4 LPM)
SS-125	5 GPM (18.9 LPM)	3 GPM (11.4 LPM)

For additional information, see Foodservice Product Information Binder.